

PLATINUM SERIES02
PROPLUS SERIES03
REP SERIES04
RE SERIES06
QM SERIES07
RAMSEY ACCESSORIES09



Platinum 9500

Platinum 9000

FEATURES

- 4.8 hp heavy duty 12-volt electric reversible motor
- 150 feet of galvanized aircraft cable (5/16") 8 mm
- Fully integrated solenoid assembly with continuous duty solenoids for reeling in cable
- Designed to fit existing Ramsey Winch mounting systems
- 3-stage planetary gear system for fast line speed
- Automatic load-holding brake for strength and reliability
- Weather shielded motor-to-motor solenoid wire cover
- 6 ft. 2-gauge battery cable with connectors
- 12 ft. remote control switch
- 4-way roller fairlead
- Limited lifetime warranty

FEATURES

- Heavy duty 12-volt electric reversible motor
- Fully integrated solenoid assembly
- 3-stage planetary gear system for fast line speed
- Automatic load-holding brake for strength and reliability
- Weather shielded motor-to-solenoid wire cover
- Cam action clutch disengages planetary gear system for free spooling
- 12 ft. (3.65 m) remote control switch
- 6 ft. (1.83 m) 2 gauge battery cables with connectors
- 4-way roller fairlead
- Limited lifetime warranty

SPECIFICATIONS

Rated line pull. (single line) 4,309 kgs
Gear reduction ratio 138:1
Motor Series wound - 4.8 hp 12V DC
Overall dimensions L 576 mm x W 156 mm x H 252 mm
Drum size Diameter 63 mm Length 228 mm
Weight 45 kgs
Cable supplied 45.7 m 8 mm galvanized aircraft cable with replaceable clevis hook
Mounting Bolt Pattern 10.00± .015 IN X 4.50± .015 IN (254.0 x 114.3 mm)

SPECIFICATIONS

Rated line pull (single line) 4,070 kgs
Gear reduction ratio. 138:1 (12V)
Motor Series wound - 3.6 hp 12V DC
Overall dimensions L 576 mm x W 156 mm x H 252 mm
Drum size.....Diameter 63 mm Length 228 mm
Weight 45 kgs
Cable supplied 45.7 m 8 mm galvanized aircraft cable with replaceable clevis hook
Mounting bolt pattern.....10.00± .015 IN X 4.50± .015 IN (254.0 x 114.3 mm)



PROPLUS SERIES



ProPlus 8000

FEATURES

- 3-stage planetary gear system for fast line speed
- Automatic load-holding brake for strength and reliability
- Cam action clutch disengages planetary gear system for free spooling
- Limited lifetime warranty

SPECIFICATIONS

Rated line pull (single line) 3,620 kgs
Gear reduction ratio 126:1 (12V)
Motor Series wound - 4.8 hp 12V DC
Overall dimensions L 576 mm x W 156 mm x H 252 mm
Drum size Diameter 63 mm Length 228 mm
Weight 45 kgs
Cable supplied 29 m 8 mm galvanized aircraft cable with replaceable clevis hook
Mounting bolt Pattern.....10.00± .015 IN X 4.50± .015 IN (254.0 x 114.3 mm)




ProPlus 6000

FEATURES

- 3-stage planetary gear system for fast line speed
- Automatic load-holding brake for strength and reliability
- Cam action clutch disengages planetary gear system for free spooling
- Limited lifetime warranty

SPECIFICATIONS

Rated line pull (single line) 2,720 kgs
Gear reduction ratio 90:1 (12V)
Motor Series wound - 4.8 hp 12V DC
Overall dimensions L 576 mm x W 156 mm x H 252 mm
Drum size Diameter 63 mm Length 228 mm
Weight 45 kgs
Cable supplied 30.5 m 6 mm galvanized aircraft cable with replaceable clevis hook
Mounting bolt pattern.....10.00± .015 IN X 4.50± .015 IN (254.0 x 114.3 mm)

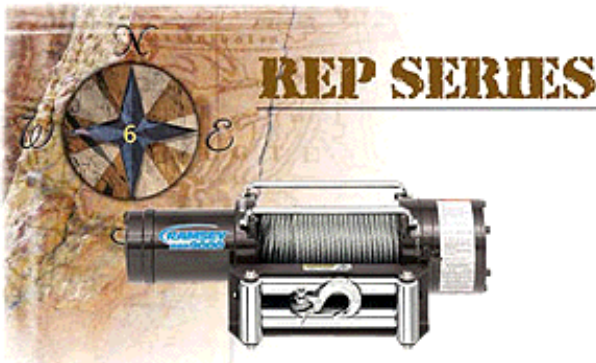

REP 9000

FEATURES

- 3 stage planetary gear system for fast line speed
- Automatic load-holding brake
- Cam action clutch disengages planetary gear system for free spooling
- Limited lifetime warranty

SPECIFICATIONS

Rated line pull (single line) 4,070 kgs
Gear reduction ratio 138:1 (12V)
Motor Series wound - 4.8 hp (12V)
Overall dimensions L 575 mm x W 156 mm x H 162 mm
Drum size Diameter 63mm Length 228mm
Weight REP 9000R 42kgs
Cable supplied 29m 8 mm galvanized aircraft cable with replaceable clevis hook
Mounting Bolt Pattern.....10.00± .015 IN X 4.50± .015 IN (254.0 x 114.3 mm)



REP 8000

FEATURES

- 3-stage planetary gear system for fast line speed
- Automatic load-holding brake
- Cam action clutch disengages planetary gear system for free spooling
- Limited lifetime warranty

SPECIFICATIONS

Rated line pull (single line) 3,620 kgs
Gear reduction ratio 210:1 (12V)
Motor Permanent magnet - 3.6 hp (12V)
Overall dimensions L 530 mm x W 152 mm x H 162 mm
Drum size Diameter 63 mm Length 228 mm
Weight REP 8000H 32kgs - REP 8000R 34kgs
Cable supplied 29 m 8 mm galvanized aircraft cable with replaceable clevis hook
Mounting bolt Pattern.....10.00± .015 IN X 4.50± .015 IN (254.0 x 114.3 mm)



REP SERIES



REP 6000

FEATURES

- 3-stage planetary gear system for fast line speed
- Automatic load-holding brake
- Cam action clutch disengages planetary gear system for free spooling
- Limited lifetime warranty

SPECIFICATIONS

Rated line pull (single line) 2,720 kgs

Gear reduction ratio 150:1 (12V)

Motor Permanent magnet; 3.6 hp (12V)

Overall dimensions L 530 mm x W 152 mm x H 162 mm)

Drum size Diameter 63 mm 228 mm

Weight..... REP 6000R 30 kgs

Cable supplied 30.5 m 6 mm galvanized aircraft cable with replaceable clevis hook

Mounting bolt Pattern.....10.00± .015 IN X 4.50± .015 IN (254.0 x 114.3 mm)



REP 5000

FEATURES

- 3-stage planetary gear system for fast line speed
- Automatic load-holding brake
- Cam action clutch disengages planetary gear system for free spooling
- Limited lifetime warranty

SPECIFICATIONS

Rated line pull (single line) 2,260 kgs

Gear reduction ratio 294:1 (12V)

Motor Permanent magnet 1.3 hp (12V)

Overall dimension L 428 mm x W 152 mm x H 162 mm)

Drum size Diameter 2.5" (63 mm) Length 5.5" (140 mm)

Weight REP 5000R 27 kgs

Cable supplied 24 m 6 mm galvanized aircraft cable with replaceable clevis hook

Mounting bolt Pattern.....6.55± .015 IN X 4.50± .015 IN (166.4 x 114.3 mm)




RE 1200

FEATURES

- Strong worm gear provides load reversing protection
- Exclusive semi-automatic RAM-LOKTM clutch disengages for free spooling; spring loaded for positive engagement
- Limited lifetime warranty

SPECIFICATIONS

Rated line pull (single line) 5,440 kgs
Gear reduction ratio 470:1 (12V)
Motor Series wound 4.8 hp (12V)
Overall dimensions L 558 mm x W 273 mm x H 260 mm)
Drum size Diameter 89 mm Length 212 mm
Weight RE 12,000R 61 kgs
Cable supplied 30.5 m (or optional 38 m) 9 mm galvanized aircraft cable with replaceable clevis hook

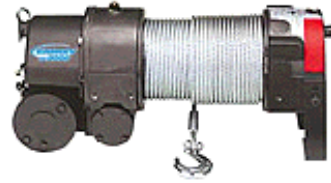

RE 800

FEATURES

- Strong worm gear provides load reversing protection
- Exclusive semi-automatic RAM-LOKTM clutch disengages for free spooling; spring loaded for positive engagement
- Limited lifetime warranty

SPECIFICATIONS

Rated line pull (single line) 3,620 kgs
Gear reduction ratio 360:1 (12V)
Motor Series wound 4.8 hp (12V)
Overall dimensions L 558 mm x W 273 mm x H 260 mm
Drum size Diameter 89 mm Length 212 mm
Weight RE 8,000R 59 kgs
Cable supplied 45.7 m 8 mm galvanized aircraft cable with replaceable clevis hook



QM SERIES



QM 9000

FEATURES

- QM 9000 must be used with a class-three rear receiver hitch with 5,000 lbs. minimum weight carrying (WC) rating (receiver must not be recessed more than 1/4 " from bumper face) --- * QM Wiring Kit and Quick Connect Battery Power Lead must be purchased with mounting Platform to mount winch.
- 3-stage planetary gear system for fast line speed.
- Cam action clutch disengages planetary gear system for free spooling
- Automatic load-holding brake for strength and reliability.
- Anti-theft, locking pin
- Limited lifetime warranty

SPECIFICATIONS

Rated line pull (single line) 4,070 kgs
Gear reduction ratio 138:1 (12V)
Motor Series sound - 3.6 hp (12V) DC
Overall dimensions L 705mm x W 365mm x H 283mm
Drum size Diameter 63mm Length 228mm
Weight QM 9000 43kgs
Cable supplied 45.7m of 8 mm galvanized air craft cable with replaceable clevis hook



QM 8000

FEATURES

- QM 8000 must be used with a class-three rear receiver hitches with 5,000 lbs. minimum weight carrying (WC) rating (receiver must not be recessed more than 1/4 " from bumper face) --- * QM Wiring Kit and Quick Connect Battery Power Lead must be purchased with mounting Platform to mount winch.
- 3-stage planetary gear system for fast line speed.
- Cam action clutch disengages planetary gear system for free spooling
- Automatic load-holding brake for strength and reliability.
- Anti-theft, locking pin
- Limited lifetime warranty

SPECIFICATIONS

Rated line pull (single line) 3,620 kgs
Gear reduction ratio 126:1 (12V)
Motor Series sound - 4.8 hp (12V) DC
Overall dimensions L 705mm x W 365mm x H 283mm
Drum size Diameter 63mm Length 228mm
Weight QM8000 45kgs
Cable supplied 29m 8 mm galvanized air craft cable with replaceable clevis hook



FEATURES

- QM 5000 will mount into any standard class-three rear receiver hitch.
- 3-stage planetary gear system for fast line speed.
- Cam action clutch disengages planetary gear system for free spooling
- Automatic load-holding brake for strength and reliability.
- Anti-theft, locking pin
- Limited lifetime warranty

SPECIFICATIONS

Rated line pull (single line) 2,260 kgs

Gear reduction ratio 294:1 (12V)

Motor Permanent magnet - 1.3hp (12)

Overall dimensions L 598mm x W 365mm x H 203mm

Drum size Diameter 63mm Length 139mm

Weight QM5000 36kgs

Cable supplied 24m of 6 mm galvanized air craft cable with replaceable clevis hook



Ramsey Accessories



Winch Accessory Kit

Includes 3,620 kgs snatch block, forged steel shackle, tree trunk protector, leather faced work gloves, and accessory carry bag.....**251002**

Components of kit also available individually:

- Snatch Block-Swivel side plate shackle-type snatch block doubles pulling power of REP 5000, REP 6000 and REP 8000, ProPlus 6000/8000 and RE 8000 winches.....**251014**
- Shackle..... **251106**
- Tree trunk protector..... **251107**
- Gloves..... **251108**
- Accessory carry bag..... **251109**

Winch Covers

Durable black polyester cover with soft inner lining, easy-attachment shock cord, and "S" hooks:

- RE 8000 winch bumpers (truck).....**251015**
- RE 8000 on Jeep Scrambler, Toyota Land Cruiser and station wagon OEM.....**251016**
- REP 6000/8000 Combo Mounting Kits when REP 8000 solenoids are not banded to motor..... **251017**
- REP 5000..... **251018**
- REP 6000/8000 Jeep Scrambler & Toyota Land Cruiser Original Kits, & REP 9000 when solenoid is separated.....**251037**
- REP 8000/9000 when solenoids are banded to motor on Combo Mounting Kits only..... **251019**
- ProPlus
- 6000/8000.....**251174**
- Platinum
- 9000/9500.....**251179**

Roller Guide Protector

- Protects roller fairlead and clevis hook from weather
- constructed of durable ABS material
- clips to fairlead rollers
- black only

Part.....**251148**



Clevis Hooks

REP 5000	
REP 6000	
ProPlus 6000	
QM 5000	
Standard.....	251138
Chrome.....	251141

REP 8000	
REP 9000	
ProPlus 8000	
Platinum 9000	
RE 8000	
Standard.....	251139
Chrome.....	251142

Platinum 9500	
RE 10000	
RE 12000	
Standard.....	251140

Winch Cable Cover



Protects cable from weather; constructed of durable ABS material; clips to tie bars; black only; fits REP 6000/8000/9000..... **251147**

Safety On-Off Switch



Shuts off power to winch (Under hood mount)
Part.....**282053**

Fairleads



Hawse fairlead for 5,000 lb. Winch	
Part.....	251150
Hawse fairlead for 6,000 to 9,000 lb. winch.	
Part.....	251152
4-way roller fairlead for 5,000 lb. winch.	
Part.....	251151
4-way roller fairlead for 6,000 to 12,000 lb. Winch	
Part.....	251153
4-way roller fairlead for RE 12,000 RX (long drum)	
Part.....	251154
Chrome 4-way roller fairlead for REP 5000	
Part.....	251155
Chrome 4-way roller fairlead for 6,000 to 12,000 lb. Winch	
Part.....	251156
4-way roller fairlead for Platinum 9500	
Part.....	274029



Replacement & Extension Cable
(galvanized aircraft replacement cable with clevis hook)

95' (28.96 m) x 5/16" (8 mm)	
Part.....	251118
100' (30.48 m) x 1/4" (6 mm)	
Part.....	251119
100' (30.48 m) x 5/16" (8 mm)	
Part.....	251120
125' (38.1 m) x 5/16" (8 mm)	
Part.....	251121
150' (45.72 m) x 5/16" (8 mm)	
Part.....	251122
100' (30.48 m) x 3/8" (9 mm)	
Part.....	251123
125' (38.1 m) x 3/8" (9 mm)	
Part.....	251124
50' (15.24 m) x 5/16" (8 mm) - two replacement clevis hooks	
Part.....	251125



Dual Battery Isolator (12V & 24V)

Handles alternators up to 95 amps; charges either or both batteries as required:

Isolator only.....	251145
Complete Isolator Kit with mounting hardware and wiring.....	251144
Complete Isolator Kit with mounting hardware and wiring for GM Delco CS series 100 alternator (1986 through 1995 models only).....	251146



Remote Control Switches

12' (3.66 m).....	251110
15'(4.57 m).....	251111
25'(7.62 m).....	251112
50'(15.24 m).....	251113
12' (3.66 m) heavy duty.....	251114
15' (4.57 m) heavy duty.....	251115
25' (7.62 m) heavy duty.....	251116
50' (15.24 m) heavy duty.....	251117