


- Operating Temp $-40^{\circ}\text{F} \sim +145^{\circ}\text{F}$
- Protected Against RFI / EMC
- A360 High Purity Aluminum Housing
- Integrated Thermal Management System
- Patented Technology



SAM-SERIES™

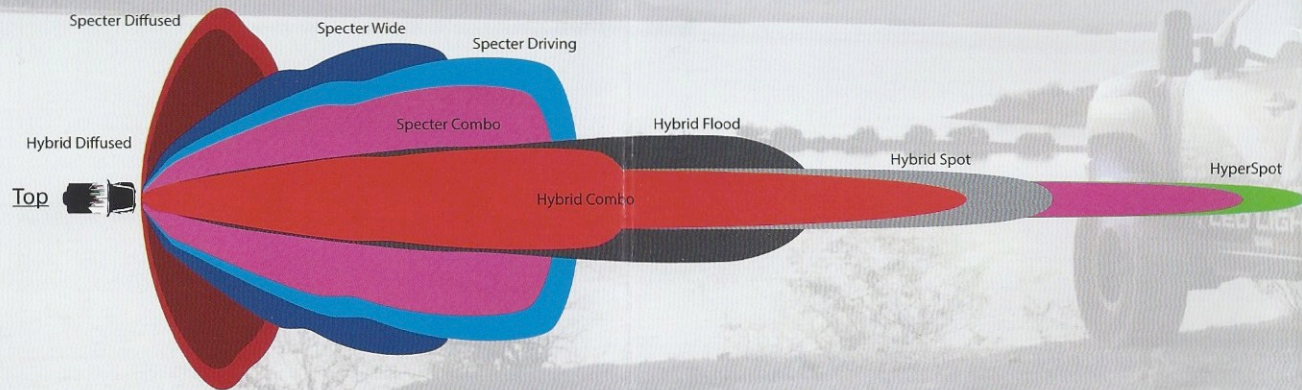

SLM



SLM2

- Slimline design
- Lightweight housing
- Also available in UV
- Compact
- Fits many OE mounts and kit mounts.

SRO-SERIES™



SRO



SRO2

- New patent pending Hyperspot optic delivers a 5° pencil beam, incredible distance and the brightest center intensity.
- Slim line design
- Lightweight housing
- Equivalent output to D-Series